48217 GTW - Pruning / Take Down / Stump Grinding / Cabling / Mulching / PHC | Harrington, Dale - ARLINGTON, 10/28/2026

Client & Site Information

SingleOps #: 48217
Client: Harrington, Dale
City: ARLINGTON
Phone: 703-555-0142 Email: d.harrington@example.com
Date: 2026-10-28 Arborist/ Sales Rep: Ian Bailey

Trees & Work Tasks

Tree #1: White Oak (DBH: 36")

Photo 48217-1

Location: Front yard, street side, canopy over driveway and N Quincy St

		LABOR HRS	PRICE
1a	Prune - Crown Clean	6 hrs	$1850.00

Remove deadwood 2" and larger throughout. Clear 10' over the driveway and 14' over the street. Reduce two co-dominant leaders over the roofline by 6-8'. ANSI A300 Part 1 - no lion-tailing.

1b	Prune - Clearance (Structure/Utility) [RECOMMENDED]	2 hrs	$450.00

Clear 8' off the gutter line on the south elevation and 6' off the Pepco triplex service drop at the street.

Tree #2: Green Ash (DBH: 22")

Photo 48217-2

Location: Rear yard, 10' off the SE corner of the house, inside the fence line

2a	Removal - Full Tree Removal	10 hrs	$3400.00

EAB decline, ~70% crown dieback. Bark blonding and D-shaped exit holes confirmed. No drop zone - rig down over the fence line to the driveway landing. Protect the shed and the AC condenser.

Photo 48217-2a

2b	**Stump Grinding [SPLIT JOB]**	2 hrs	$475.00

Grind 8" below grade, 24" past the flare. Backfill with grindings, haul the excess. Separate visit once the crane lane permit is closed out.

Tree #3: Sugar Maple (DBH: 28")

Photo 48217-3

Location: Side yard north, 6' off the neighbor fence at 1418

3a	Cabling / Bracing [RECOMMENDED]	4 hrs	$1250.00

Included-bark union at 2/3 height with a visible seam. Install one dynamic cable (Cobra 2t) above the union per ANSI A300 Part 3. Re-inspect at 12 months.

Photo 48217-3a

Work Tasks for Multiple Trees

		LABOR HRS	PRICE
M1	Mulching	3 hrs	$420.00

Install 3" shredded hardwood mulch to the dripline on Trees 1 and 3. Pull back 6" from the root flare - no volcano mulching.

Includes selected trees: Tree 1: White Oak, Tree 3: Sugar Maple

Plant Health Care (PHC) Tasks

		LABOR HRS	PRICE
P1	**Root Care [RECOMMENDED]**	2 hrs	$540.00

Vertical mulching and biochar soil amendment through the compacted driveway-side CRZ on Tree 1. Follow-up soil test in spring.

Includes selected trees: Tree 1: White Oak

Additional Priced Equipment

Crane 28-ton boom truck, 90' reach, street set-up on N Quincy: $2200.00

Required Equipment

Bucket Truck: 75'
Chipper: Standard
Chip Truck: Standard
Extra Chip Truck: Standard
Stump Grinder: Rayco
Mini Loader: ML2
Crane: 28-ton boom truck, 90' reach, street set-up on N Quincy
Crew Details: 4 - 2 climbers, 2 ground; CDL driver

Work Plan & Mobilization Logistics

Day 1 (crew of 4 + crane): set up on N Quincy under traffic control, rig Tree 2 down over the fence line to the driveway landing, chip and haul. Plywood over the lawn from the driveway to the rear gate - the gate is 42" so the mini loader goes in before the fence panel is reset. Day 2: Tree 1 prune off the 75' bucket from the street, Tree 3 cable install, mulch pass on Trees 1 and 3. Stump grind on a separate visit after the lane permit closes.

Photo Work Plan

Safety Concerns

Pepco triplex service drop runs through the lower south side of Tree 1 at the street. Secondary conductor, insulated - clearance pruning only, no limb drops toward the drop. Pepco shut-off NOT required. Steep grade on the SE side of the house: no outrigger set-up on the retaining wall, crane sets on the street only.

Access & Permits

- **Neighbor's Written Permission**
  Neighbor at 1418 N Quincy (Alvarez). Written permission received 10/27 by email for rigging over the shared fence and for crew access to reset the fence panel.
- **Pepco**
  Secondary insulated triplex at the street. Clearance pruning only - no drop or shut-off needed. Confirmed with the Pepco vegetation line 10/27.
- **Parking Permits**
  Two spaces on N Quincy for the crane day. Arlington County - office applies, needs 10 business days' lead.
- **Miss Utility**
  Ticket #2026-30117, called in 10/27. Marks expected 10/30. Required for the stump grind and the mini loader route.
- **Traffic Control**
  Two flaggers, lane shift on N Quincy. County window is 9:00a-3:00p only - no AM or PM rush.

Crew / Internal Notes

Crew Notes: Gate on the north side is 42" - mini loader in before the fence panel is reset. Dog (friendly, large) is in the house on work days. Drop zone is the driveway only; the rear lawn has an irrigation head field. Park the chipper in the driveway, not on the lawn.
Internal Notes: Crane day has to land on a weekday for the lane permit. Client asked about the ash twice - lead with the removal. Soil work on Tree 1 is a good PHC handoff for the spring.
Scheduling Concerns: Client is away 11/14-11/21. Avoid school pickup 2:30-3:30 on N Quincy. Crane and traffic control must be the same day.

Client Notes: Three trees reviewed. The ash is in decline from emerald ash borer and is removed with the stump ground on a return visit. The white oak is pruned for deadwood and clearance, and the maple gets a support cable at the weak union. Mulching is included for the oak and the maple.

Tags

Bucket Truck 75' | Chipper Standard | Chip Truck Standard | Extra Chip Truck Standard | Stump Grinder Rayco | Mini Loader ML2 | Crane 28-ton boom truck, 90' reach, street set-up on N Quincy | Neighbor's Written Permission | Pepco | Parking Permits | Miss Utility | Traffic Control | Crew: 4 - 2 climbers, 2 ground; CDL driver

Tree Photos & Site Map: for the SingleOps inventory map


Use these to place and label each tree in the SingleOps inventory map. Photo labels match the SingleOps tree IDs.




Pins come from phone GPS (often off by 3-10 m) unless fine-tuned on the satellite view in the app.



48217-1
Tree #1: White Oak

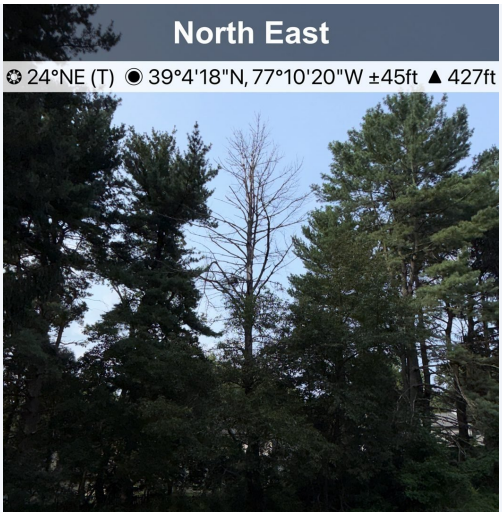

48217-2
Tree #2: Green Ash

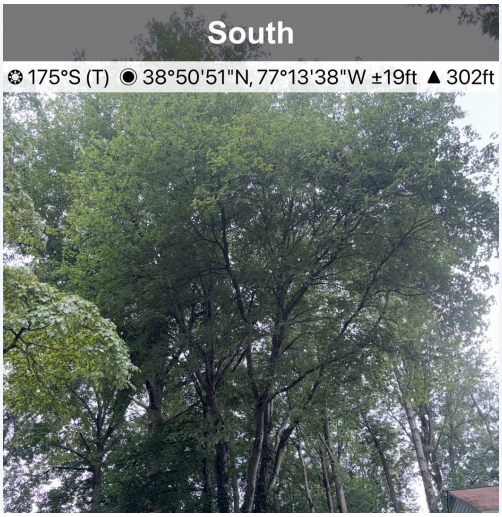

48217-3
Tree #3: Sugar Maple

Task Photos




48217-2a
2a: Removal - Full Tree Removal



48217-3a
3a: Cabling / Bracing

Work Plan Photos

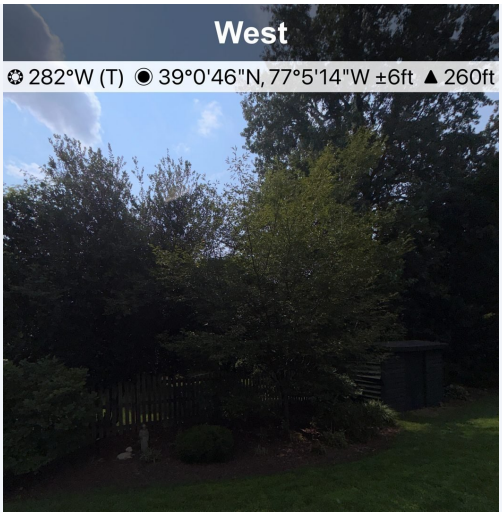

Work Plan

Work plan & mobilization logistics